


Sol² S-Series 225P

Mechanical Characteristics

Length (mm)	1660
Width (mm)	990
Height (mm)	45
Weight (Kg)	19
Junction Box	1 x Tyco junction Box with 3 Bypass diodes
Cables	Solar Cable, Length 1000mm, 4 mm ² thick Assembled
Front Substrate	HiT SM, ARC White Glass glass 3.2mm thickness
Cells	60 polycrystalline cells (156 x 156 mm)
Encapsulation Material	EVA - Ethylene Viynl Acetate
Back Substrate	Composite Sheet Tedlar or APA
Frame	45 mm Aluminum profile - Natural or Black Anodized
Unframed Dimensions	1652 x 982 x 5 mm (LxWxH) (Tol. +/- 2mm)

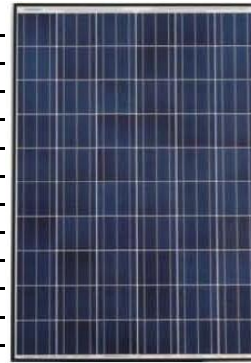

Electrical Characteristics

Power Class	250	245	240	235	230	225
Power Tolerance	± 2%	± 2%	± 2%	± 2%	± 2%	± 2%
Min Power (W)	245	240.1	235.2	230.3	225.4	220.5
Voltage at Max Power (Vmp)	30.2	29.95	29.7	29.4	29.3	28.9
Current at Max Power (Imp)	8.38	8.27	8.16	8.04	7.95	7.82
Open circuit Voltage (Voc)	37.33	37.18	37.03	36.9	36.7	36.6
Short Circuit Voltage (Isc)	9.03	8.91	8.78	8.65	8.55	8.4
Maximum System Voltage	1000	1000	1000	1000	1000	1000

Voltage temperature correction factor (Open Circuit)	-0.35%/K
Current Temperature correction factor (Short Circuit)	0.05%/K
Power Temperature correction Factor	-0.44 %/K
NOCT	45°C
(STC) Standard testing conditions :	1000 W/m ² , AM 1.5, 25°C

Use Conditions


Temperature Range	-40 °C to + 85°C
Hail Test	Limited to a diameter of 28mm at an impact speed of 86 km/h
Test Load	Certified up to 5400 Pa according to IEC 61215 Ed. 2

Certification

IEC 61215:2005 Ed. 2	Certified
EN6170 Class 1 & Class 2	Certified

Warranty

Product	3 years
Power	Terrestrial: 25 years 80% yield Marine: 10 years / 90% yield

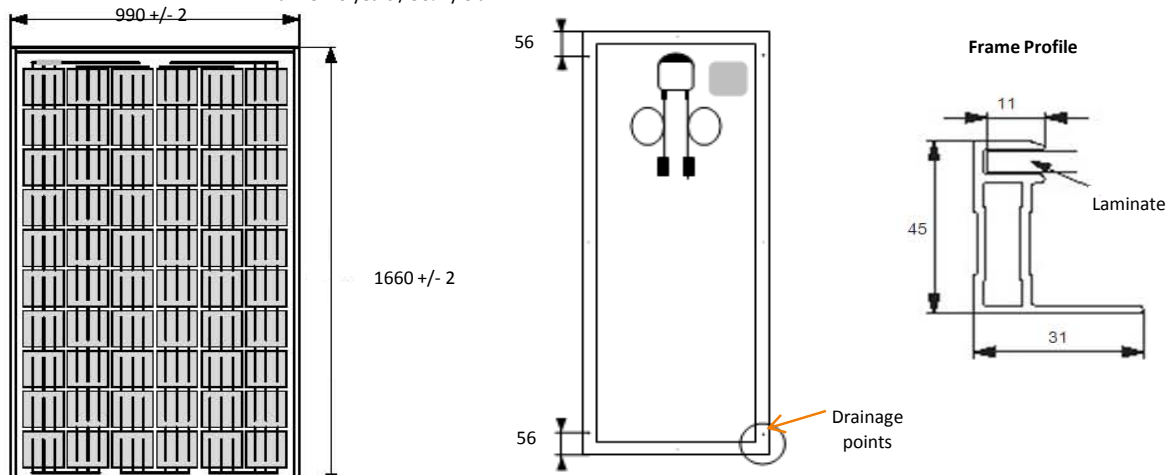

www.solsquare.com

Solsquare South Africa | Tel: +27(0)861 765 7782 | info@solsquare.com | Solsquare Namibia | Tel: +26461 211 675 | info.namibia@solsquare.com

